

# 545W~565W

**M10 solar modules** Aquaman series  
Mono MBB perc large size half cut module


Excellent technical advantages and system design scheme to achieve high reliability, power generation effective gain and EPC cost reduction. Products can match different installation conditions, taking into account high adaptability and high compatibility. With mature support and inverter scheme, customized design for industrial and commercial and centralized ground power stations.

## MODULE CHARACTER

-  PID Resistance
-  Salt mist resistance/Ammonia resistance /dust and hail resistance
-  Production process reliability test
-  0~+5W Positive Tolerance
-  Mono MBB half cut
-  Reduce BOS cost increase ROI
-  Non-destructive cutting

## CERTIFICATION

IEC61215/IEC61730  
ISO9001:Quality Management System  
ISO14001:Environmental Management System  
ISO45001:Occupational Health and Safety Management System

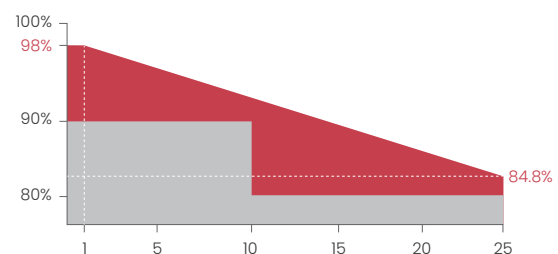

Linear performance warranty



Product warranty

**SUNRISE ENERGY CO., LTD** TEL: +86-519-81688389 E-mail: info@sunriseenergy.cn

ADD: No.20 Tongzi River West Road, Zhonglou Development Zone, Changzhou, Jiangsu

⚠ If any update, Sunrise would not make further notice. Sunrise reserves the right of final interpretation.



Module Type	SR-72M545HLPro		SR-72M550HLPro		SR-72M555HLPro		SR-72M560HLPro		SR-72M565HLPro	
Module Efficiency (%)	21.2		21.31		21.51		21.7		21.9	
Tolerance (W)	0 ~ +5		0 ~ +5		0 ~ +5		0 ~ +5		0 ~ +5	
Test Environment	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power Pmax(W)	545	405.61	550	409.33	555	413.05	560	416.77	565	420.49
Open Circuit Voltage Voc(V)	49.5	46.73	49.65	46.87	49.81	47.02	49.97	47.17	50.13	47.32
Short Circuit Current Isc(A)	14.04	11.34	14.13	11.41	14.21	11.47	14.29	11.54	14.38	11.61
Maximum Power Voltage Vm(V)	40.86	38.02	40.99	38.14	41.12	38.26	41.25	38.38	41.38	38.50
Maximum Power Current Im(A)	13.34	10.67	13.42	10.73	13.5	10.80	13.58	10.86	13.66	10.92
Cell Type (mm)	MBB(Mono-Crystalline Silicon)									
Number of Cells (Pcs)	144(6×24)									
Maximum System Voltage(V)	DC1500									
Temp.Coeff.of Voc (%/°C)	-0.282									
Temp.Coeff.of Isc (%/°C)	0.05									
Temp.Coeff.of Pm (%/°C)	-0.348									
Operating Temperature(°C)	-40 to 85									
Nominal Operating Cell Temperature(NOCT)	45±2									
Max.Series Fuse (A)	25									
Pressure Bearing (Pa)	5400									
Wind Bearing (Pa)	2400									

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AML5  
 NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind speed 1m/s


### MATERIAL DETAILS

Frame	Anodized aluminum	Net length of Cable	350mm or as customer's requirements
Cell	6×24pcs mono solar cell	Junction Box	IP≥68, TÜV & UL
Diode quantity	3	Cable&Connector	4mm <sup>2</sup> , EVO2 or EVO2 compatible
Glass	3.2mm Anti-Reflection Coating Heat Strengthened Glass		


### PACKING DETAILS

Dimension	2278×1133×35mm	Weight	28kg
Loading Capacity	620pcs/40HC	Packing	31pcs/pallet


### ENGINEERING DRAWINGS

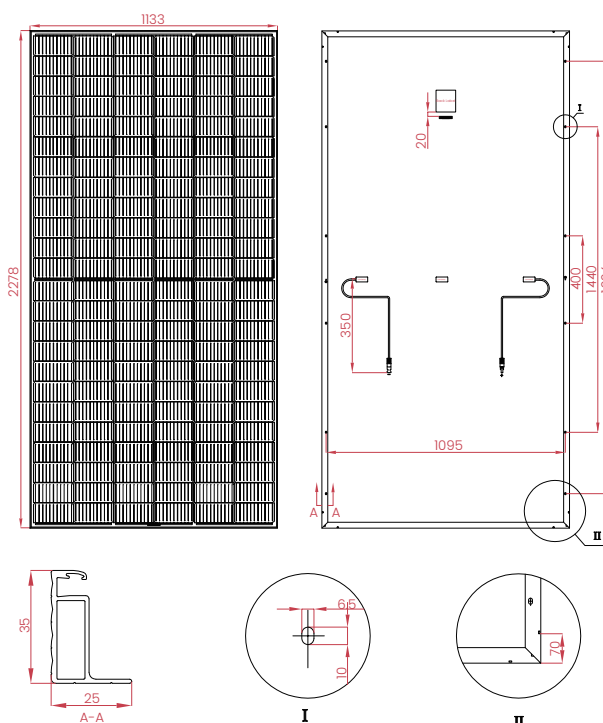

### IV CURVES

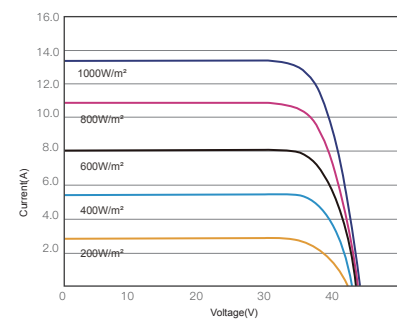

I-V CURVES OF PV MODULE(555W)

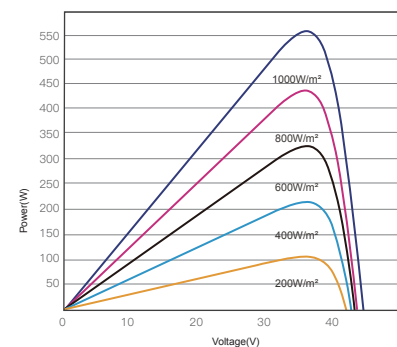

P-V CURVES OF PV MODULE(555W)